


  
**·DEMMANS·**



**DEM 65DW**

**DEMMANS  
DIESEL GENERATING SET  
TECHNICAL SPECIFICATIONS**



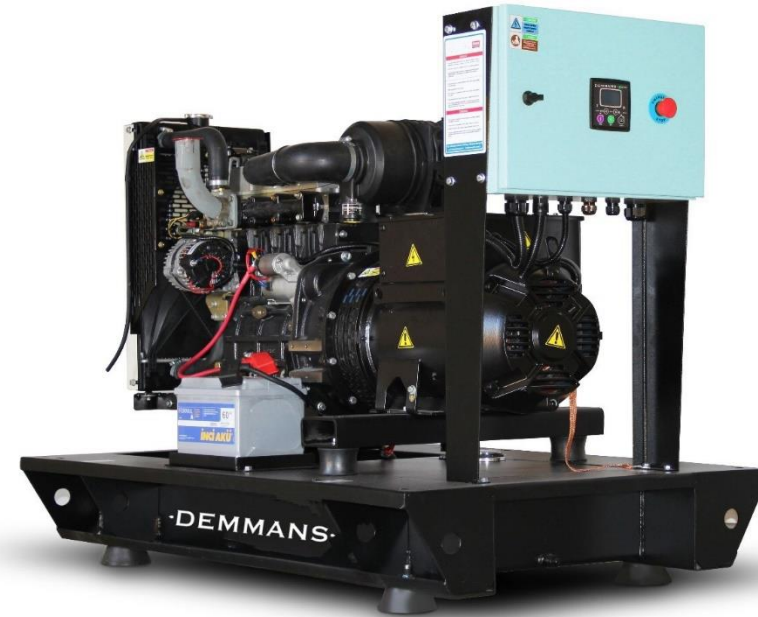

ELECTRICAL			
FREQUENCY	VOLTAGE	PRIME	STAND-BY
50 Hz	400/230 V	57 kVA / 45,6 kW	63,6 kVA / 50,9 kW
Rated Speed	1500 RPM		
Phase	3		
Power Factor	0,8		

WEIGHT AND DIMENSIONS			
		OPEN	CANOPY
Length	mm	1950	2700
Width	mm	1000	1000
Height	mm	1550	1800
Wet Weight	kg	1140	1400

**Prime :** This rating is for the supply of continuous electrical power at variable load. There is no limitation on the annual hours in operation and 10% overload power can be supplied for 1 hour in 12.

**Stand-by :** This rating is for the supply of continuous electrical power at variable load , in the event of utility power failure. No overload is permitted


ENGINE		
Output Rating	kWm	58
Manufacturer and Model		Daewoo 4DWD-75
Fuel		Diesel
Injection		Direct
Aspiration		Turbocharged
Cylinders		4
Bore and Stroke	mm	108 x 125
Displacement	lt	4,6
Cooling		Water
Engine Oil Specification		SAE 15W40
Compression Ratio		16 : 1
Engine Oil Capacity	lt	14
Coolant Capacity (incl.radiator)	lt	24
Governor		Mechanical
Air Filter		Dry element
Fuel Consumption		50 Hz
110 % Load	lt/h	17,1
100 % Load	lt/h	15,4
75 % Load	lt/h	12,3
50 % Load	lt/h	9,0

ALTERNATOR		
Poles		4 pole
Winding Connections		Star
Insulation		Class H
Enclosure		IP23
Exciter System		Self regulating Brushless
Voltage Regulator		AVR
Steady State Voltage Regulation		± 1 %
Bearing		Single bearing sealed
Coupling		Flexible disc
Cooling		Direct drive centrifugal blower fan



FUEL SYSTEM		
Diesel Specification		EN590
Fuel Tank Capacity	lt	130

**CONTROL PANEL - DMP500**

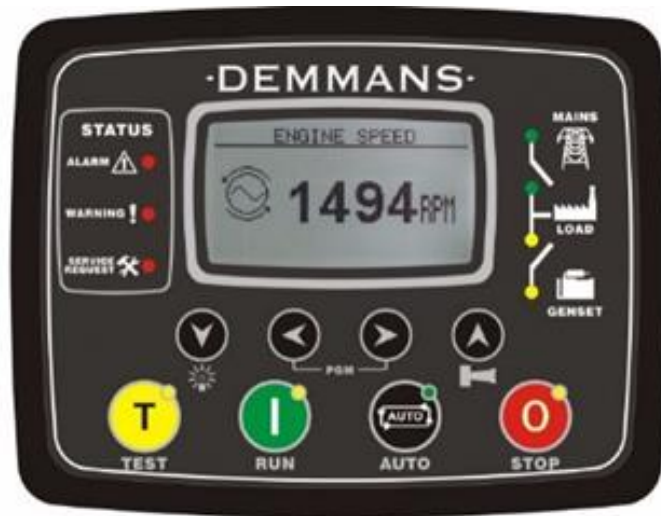

The DMP500 is next generation genset control unit combining multi-functionality and wide communication possibilities together with a reliable and low cost design.

The unit complies and mostly exceeds world's tightest safety, EMC, vibration and environmental standards for the industrial category. Software features are complete with easy firmware upgrade process through USB port. The Windows based PC software allows monitoring and programming through USB, serial and GPRS.

CONTROL PANEL FEATURES	
<b>Alarm and Shutdown functions</b>	
High Coolant Temperature	Alarm & Shutdown
Low Oil Pressure	Alarm & Shutdown
Battery High / Low Voltage	Alarm
Battery Charger Alternator Failure	Alarm
Overspeed / Underspeed	Alarm & Shutdown
Failure to Start	Alarm & Shutdown
Low Coolant Level	Alarm & Shutdown
Stop Fault	Alarm & Shutdown
Low Fuel Level	Alarm
Service Required	Alarm
Generator High / Low Voltage	Alarm & Shutdown
Generator High / Low Frequency	Alarm & Shutdown
Symmetry between Phases	Alarm & Shutdown
Over Current	Alarm & Shutdown
Rectifier Fail	Alarm
ECU failure	Alarm
<b>Measure and Monitor functions</b>	
Total Run Hour	Coolant Temperature
kW meter - Generator	Oil Pressure
Service Indicator	Fuel Level
Phase to Phase Voltage - Mains	Battery Voltage
Phase to Neutral Voltage - Mains	Engine RPM
Phase to Phase Voltage - Generator	Battery Charge Alternator Voltage
Phase to Neutral Voltage - Gen.	Frequency - Generator & Mains
Phase current - Generator	Power Factor - Generator
<b>Other functions</b>	
Events History	Programmable Timer
External Start Capability	Multi Lingual
Start Restriction Program	Lamp test
Mains Failure Start	Remote Monitoring
Test Run Start (On load & off Load)	Manual Override
Allows SMS controls	Remote Programming
Fuel consumption counter	Magnetic Pick Up Input
Waveform display of voltage & current	Total Harmonic Distortion view
Programmable as an ATS controller	Manual "speed fine adjust" on selected ECUs
Standardized USB port for programming and communication	J1939-CANBUS for electrocally governed engines

GENERATOR FEATURES	STANDARD		OPTIONAL	GENERATOR FEATURES	STANDARD		OPTIONAL
	MANUAL	AUTOMATIC			MANUAL	AUTOMATIC	
Engine		•	X	ENGINE			
Cooling Pack		•	X	ELECTRICS			
Tropical Radiator	X		•	Alternator		•	X
Heavy Duty Air Filter	X		•	Circuit Breaker - 3 poles		X	•
Electronic Governor		•	X	Circuit Breaker - 4 poles		X	•
High Coolant Temperature Sender		•	X	Battery Isolator		X	•
Low Oil Pressure Sender		•	X	Earth Fault Protection		X	•
Low Coolant Level Sender		•	X	Anti condensation Heater		X	•
Radiator Guards		•	X	Optional Voltages		X	•
Hot Component Guards		•	X	Class F insulation		X	•
Manual Oil Drain Pump	X		•	External Stop Button - Canopy		•	X
Fuel Prefilter	X		•	GSM SMS message sending on fault		X	•
Water Jacket Heater	X	•	• (Manual)	Battery Charger	X	•	• (Manual)
Industrial Silencer - Open Set		•	X	ATS Panel - 3 Poles	X	•	X
Residential Silencer - Open Set	X		•	ATS Panel - 4 Poles	X	X	• (Automatic)
Residential Silencer - Canopy		•	X	Synchronisation Panel	X	X	• (Automatic)
Cold start aid	X		•				
Remote Radiator	X		•				
Trailer	X		•				

• - Available X - Not Available

DEMMAANS Generating Sets are CE certified and conform to the following standards ;

- Power according to ISO 3046 and ISO 8528
- EN 12100 , EN 13857 , EN 60204
- 2006/42/CE Machinery Safety
- 2006/95/EC Low Voltage
- 2004/108/CE EMC
- Ambient reference conditions 1000 mbar, 25 °C, 30 % relative humidity ISO8528

All the information in this leaflet is intended for general purposes only. DEMMAANS reserves the right to change the specifications without notice.

### DEMMAANS

Uğur Mumcu Caddesi Kırçiçeği Sokak No: 4/6  
 G.O.P. Çankaya ANKARA / TÜRKİYE  
 Tel : + 90 312 446 26 06 Fax : + 90 312 446 26 05  
 E-mail : [info@demmans.com.tr](mailto:info@demmans.com.tr)  
 Web : [www.demmans.com.tr](http://www.demmans.com.tr)

